

## 3X High Speed Measuring Tapes

Most Robust 3X series Double(W)Nylon Coating!

# Super Stilon



**W COAT**  
**3X DRIVEN**  
**TENSION 50N**

### [DETAILS](#)

#### Super Stilon

Description	Model	Grad.	Length
	METRIC SERIES		
Open type Reel (Printed on one side)	SNR30X	Metric	30M
	SNR50X		50M
	SNR60X		60M
	SNR100X		100M
	FEET SERIES		
Open type Reel (Printed on one side)	SNR100F8X	infeet, inches & 8ths	100ft
	SNR165F8X		165ft
	SNR200F8X		200ft

	SNR300F8X	300ft
	SNR100F10X	100ft
Open type Reel (Printed on one side)	SNR165F10X	infeet, 10ths, 165ft
	SNR200F10X	& 100ths 200ft
	SNR300F10X	300ft


**METRIC & FEET SERIES**

	SNR30MF8X	30m 100ft
Open type Reel (Printed on two sides.)	SNR50MF8X	Metric/infeet, 50m 165ft
	SNR60MF8X	inches & 8ths 60m 200ft
	SNR100MF8X	100m 330ft
	SNR30MF10X	30m 100ft
Open type Reel (Printed on two sides.)	SNR50MF10X	Metric/infeet, 50m 165ft
	SNR60MF10X	10ths, 60m 200ft
	SNR100MF10X	& 100ths 100m 330ft


**W COAT**

# *Super Stilon* **3X DRIVEN**

**Most Robust 3X series Double(W)Nylon Coating!**  
**No one can beat it in the world!!**

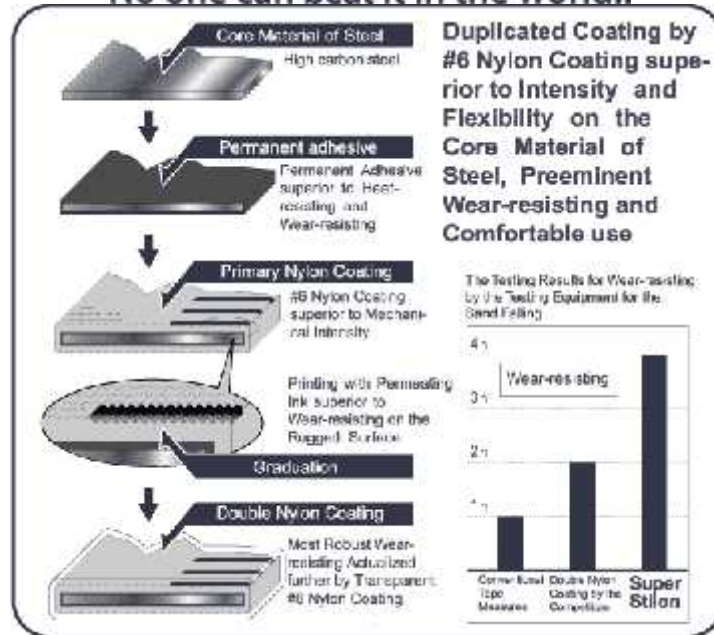



**Most Robust 3 Times Faster Rewinding Mechanism  
by our Original 6 Gear Structure (Composition),  
Smooth and Speedy**

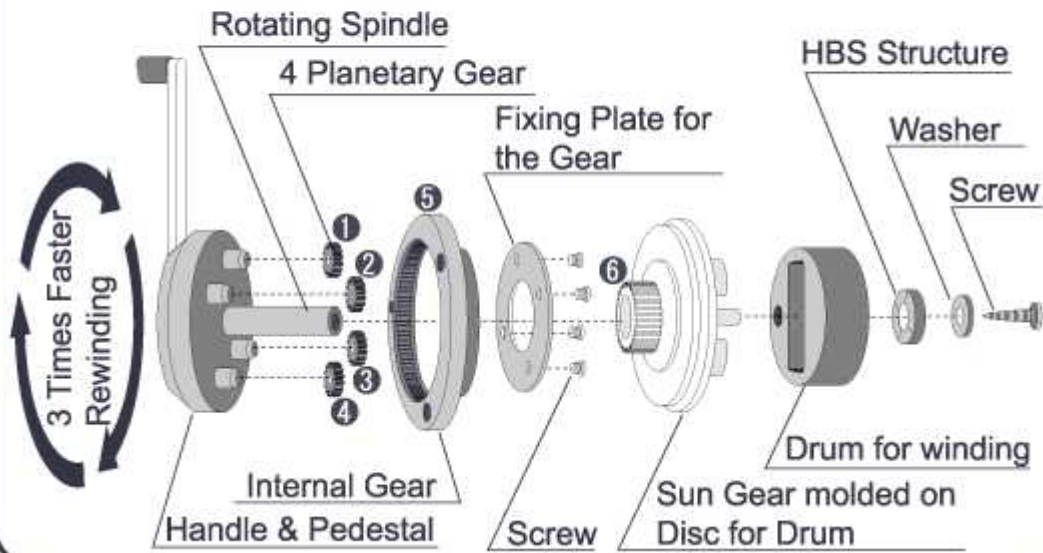

Shoe, Handle and Both Side End of the Reel are all made of Metal



So sophisticated design for reel case!!

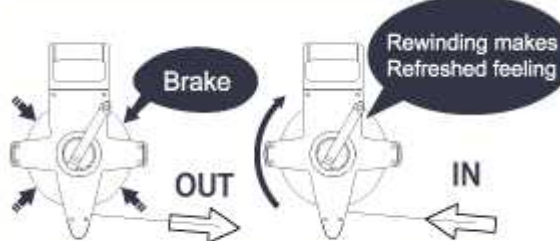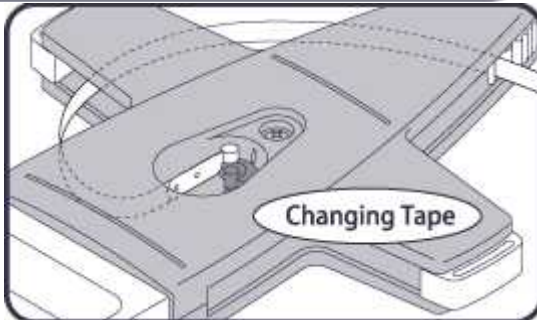

Very reliable brake function inside!!

- Tape width : 10mm
- Tape thick : 0.5mm
- Tension : 50N
- Temperature : 20°C
- Material : steel SK85 (former SK5)